
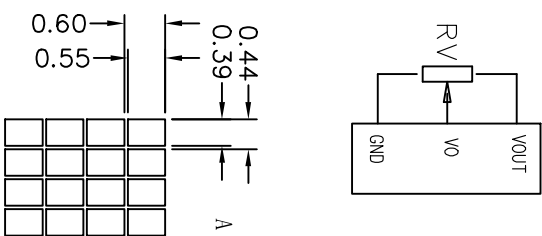
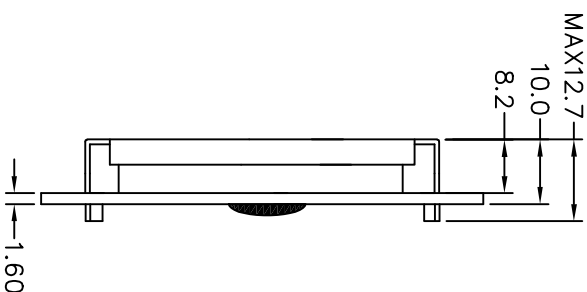


Customer approval :

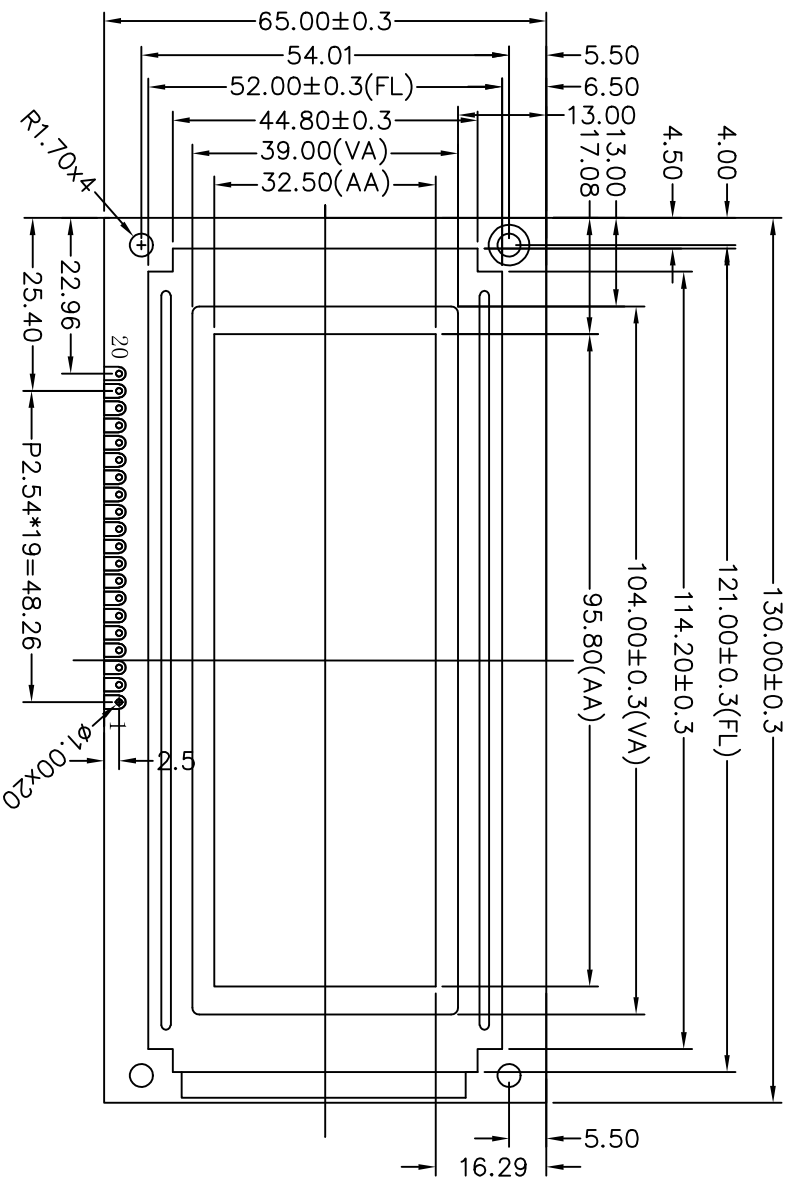

接口说明:
PSB (R6) =H 并口模式
Parallel

1	2	3	4	5	6	7	8	9	10
GND	VDD	VO	/RST	RS	R/W	E1	E2	PSB	DB0
DB1	DB2	DB3	DB4	DB5	DB6	DB7	BLA	BLK	VOUTorNC

PSB (R12) =L 串口模式
seria

1	2	3	4	5	6	7	8	9	10
GND	VDD	VO	/RST	/CS	SID	sclk1	sclk2	PSB	
11	12	13	14	15	16	17	18	19	20 选用
							BLA	BLK	VOUTorNC

SPECIFICATION:

- 1). Driving: Duty:1/64,Bias:1/9,Vdd:5.0V,Vlcd:6.0V
- 2). VIEWING DIRECTION: 6 O'CLOCK
- 3). Display mode: STN/Blue/Negative/Transflective
- 4). Operating temp.: -20°C~+70°C
- 5). Storage temp.: -30°C~+80°C
- 6). Control IC: ST7920 or AIP31020
- 7). BACKLIGHT: white LEDX4 5.0V 60MA
- 8). DIMENSIONS WITH MARK "*" ARE IMPORTANT WITH MARK "()" ARE REFERENCED
- 9). All the raw materials are RoHS compliant

REVISION RECORD

REV	REV	REV
A0	First issue	
深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd		
DRAWING NO.	SYB19264CZKV20-5C11BLN2R	GENERAL TOL: ± 0.2
APPROVED BY	CHECKED BY	DRAWING BY
ISS	LGJ	KGD
		2010/12
		UNIT: mm
		PAGE 1/1