
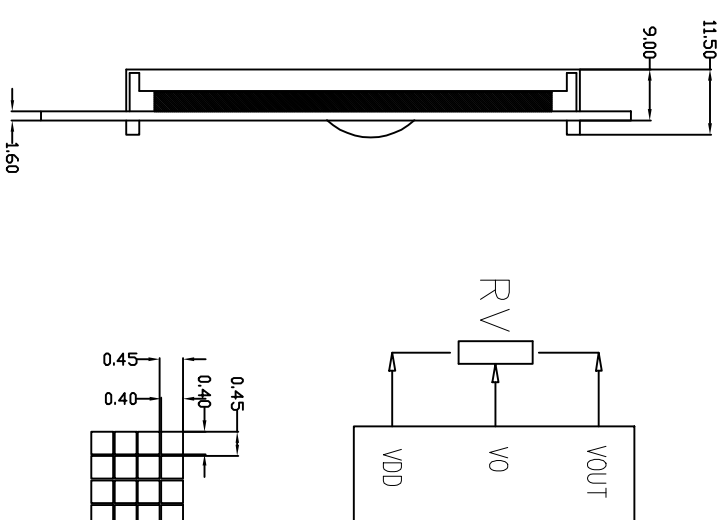


Customer approval :

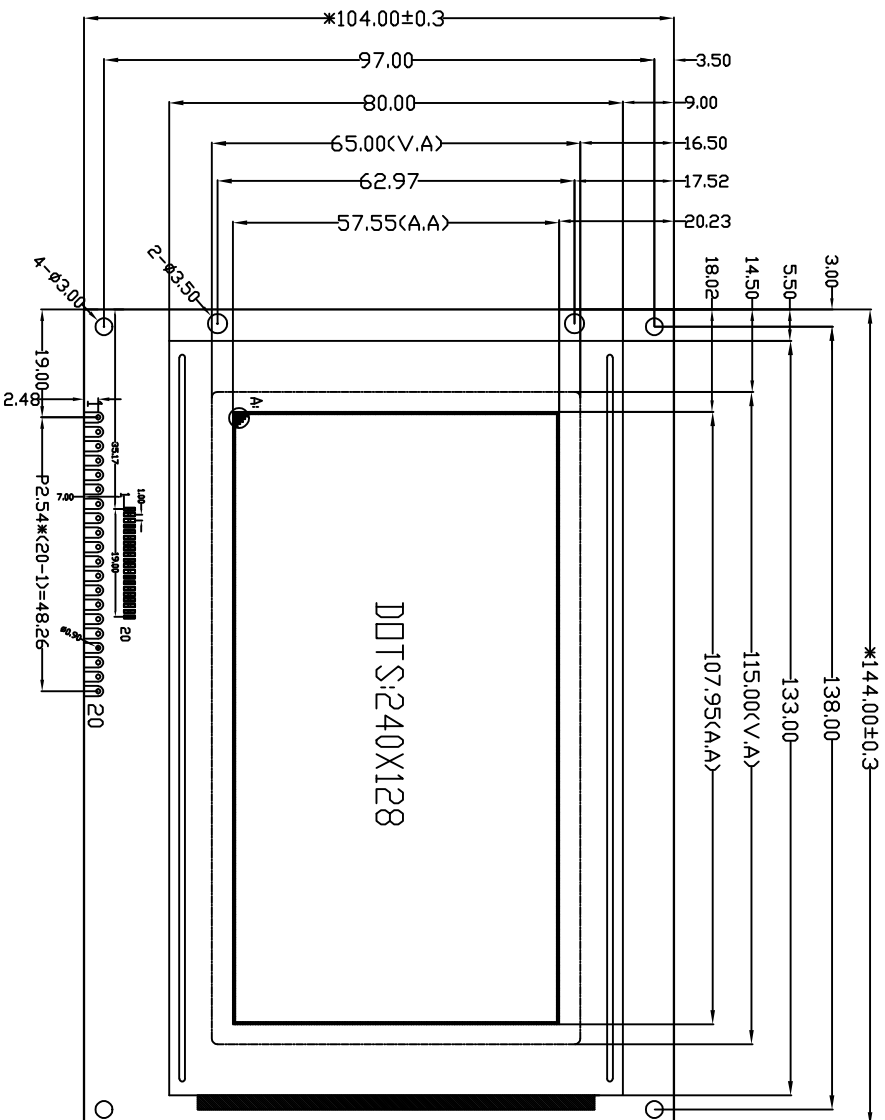

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	FGND	GND	VDD	V0	WR	RD	CE	C/D	RES	DB0	DB1
PIN	12	13	14	15	16	17	18	19	20		
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	BLK	BLA	VOUT		

SPECIFICATION:

- 1). Driving: Dots:240*128, Duty:1/128, Bias: 1/12, Vdd: 5.0V, Vout: -14V, Vo: -12.4V
- 2). Viewing angle: 6 O'Clock
- 3). Display mode: STN/BLUE MODE/TRANSMISSIVE/NEGATIVE
- 4). Operating temp: -20°C~+70°C
Storage temp: -30°C~+80°C
- 5). Controller IC: T6963
- 6). Backlight: White
- 7). Dimensions with mark "*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

REVISION RECORD		REV	DRAWING NO.		GENERAL TOL:	
First issue		A0	SYB240128A4V10-SC5BLV7R8-BSNI		± 0.3	
			APPROVED BY		UNIT:	PAGE
			CHECKED BY		mm	1/1
			DRAWING BY			
			LAN			
			2013/03/29			


深圳市三元晶科技有限公司
 Shenzhen TCC LCD Hi-Tech Co., Ltd.