


Customer approval :

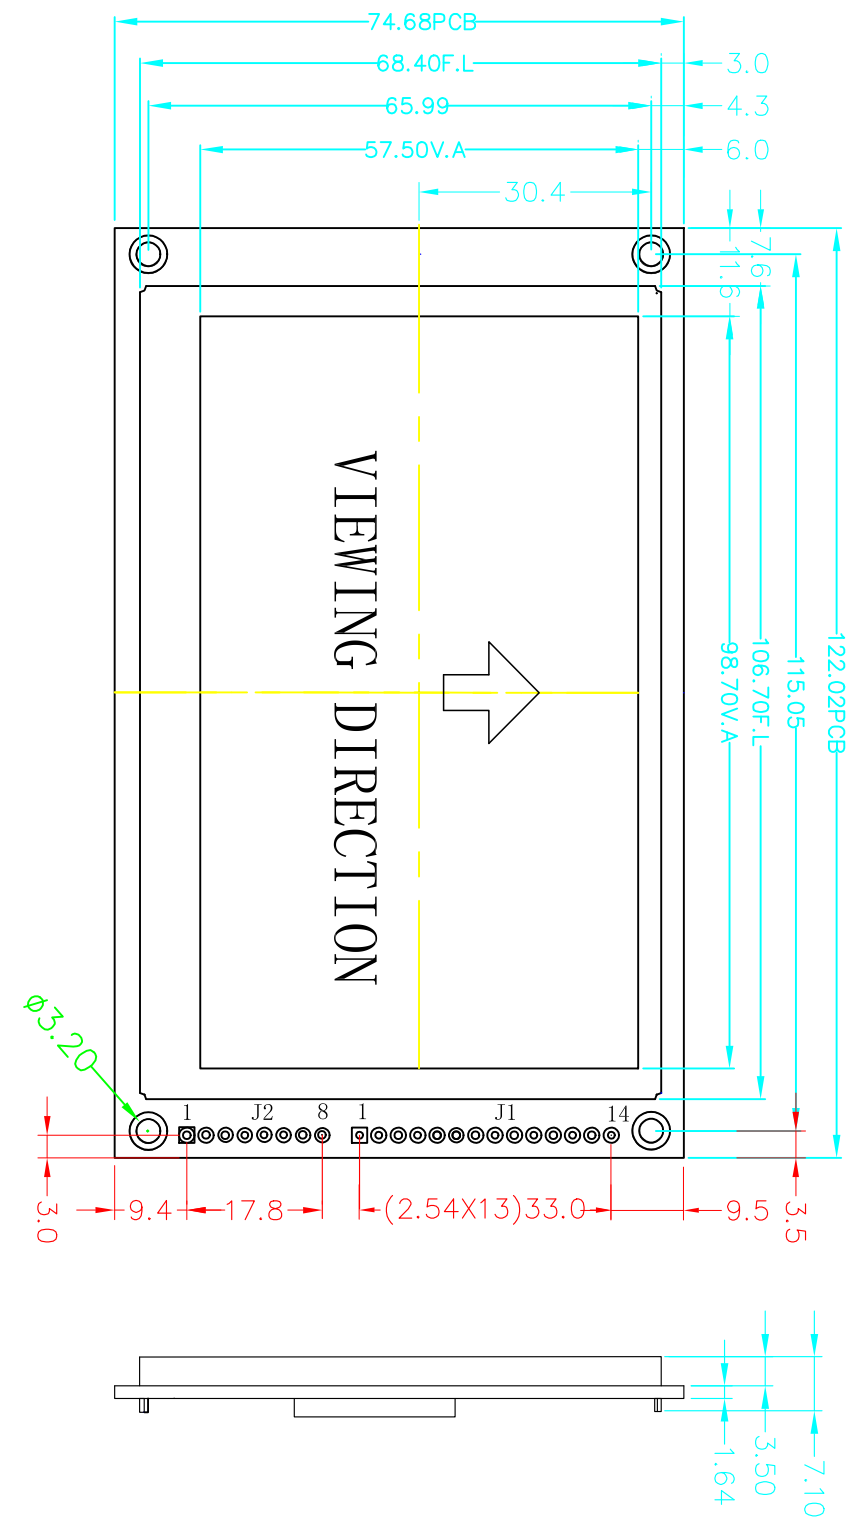

J1	
NO.	SYMBOL
1	GND
2	VCC
3	SCS#
4	SCLK
5	SD
6	SD1
7	RST
8	INT
9	DISP OFF
10	RTP-CLK
11	RTP-CS
12	RTP-DIN
13	RTP-DOUT
14	RTP-IRQ

J2(FLASH)

PIN	1	2	3	4	5	6	7	8
CONNECTION	SFCS0	SFCS1	SFDI	SFDO	SFCLK	VCC	GND	RST

Specification:

- 1). Driving:VDD:3.3V 80MA
- 2). Viewing direction: 6 o'clock
- 3). Display mode: TFT 480(RGB)*272
- 4). Operating temp.: -10°C~+60°C
- 5). Storage temp.: -20°C~+70°C
- 6). Control IC: TC76680
- 7). BACKLIGHT :VBL:3.3V IBL:130mA 500cd/m²
- 8). Interface:SPI

REV	REVISION RECORD	DATE	MODEL NO.	CHECKED BY	DRAWING BY	GENERAL TOL:
A	FIRST ISSUE	2018/07/23	模组型号	APPROVED BY	LXX	± 0.25
B			审核	检查	LXX	
C			审核	检查	LXX	
D			审核	检查	LXX	



深圳市三元晶科技有限公司
ShenZhen TCCLCD Hi-Tech Co., Ltd.

