


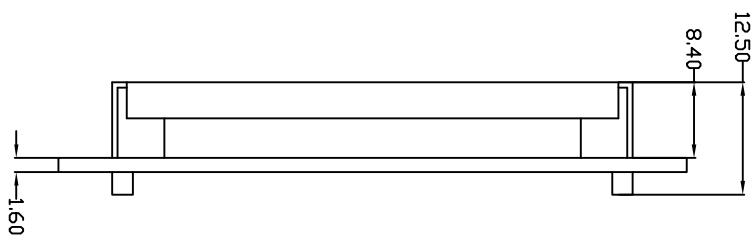


Customer approval :

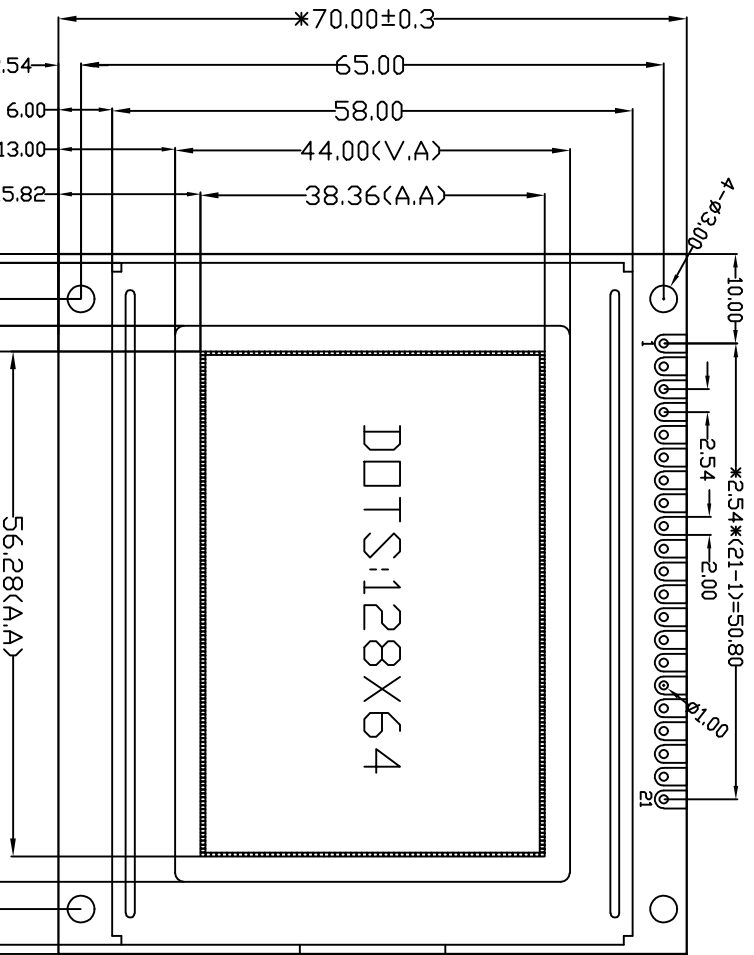

Specification:

- 1). Driving: Dost:128*64,Duty:1/64,Bias:1/9,VDD:5V,VOUT:-4.9V,V0:-4.2V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: STN/Negative/Transmissive/Blue
- 4). Operating temp.: -20°C~+70°C
Storage temp.: -30°C~+80°C
- 5). Controller IC: T6963C
- 6). Backlight: Bottom ,White
- 7). Dimensions with mark "*" are important, with mark "(")" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11
CONNECTION	FG	VSS	VCC	V0	RW	RD	CE	CO	RST	DB0	DB1
PIN	12	13	14	15	16	17	18	19	20	21	
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	FS	BLK	BLA	VOUT	

REV	REVISION	RECORD	DATE
A0	First issue		02/27


 深圳市三元晶科技有限公司
 ShenZhen TCC LCD Hi-Tech Co., Ltd

REV	REVISION	RECORD	DATE	MODEL NO.	APPROVED BY	CHECKED BY	DRAWING BY	GENERAL TOL:	PAGE?	UNIT:
A0	First issue		02/27	SYM12864BV201-5C5BLN7R-BSNG				± 0.3	1 OF 1	mm

