


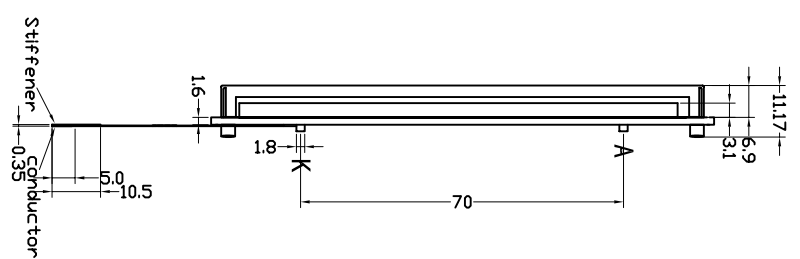


Customer approval :

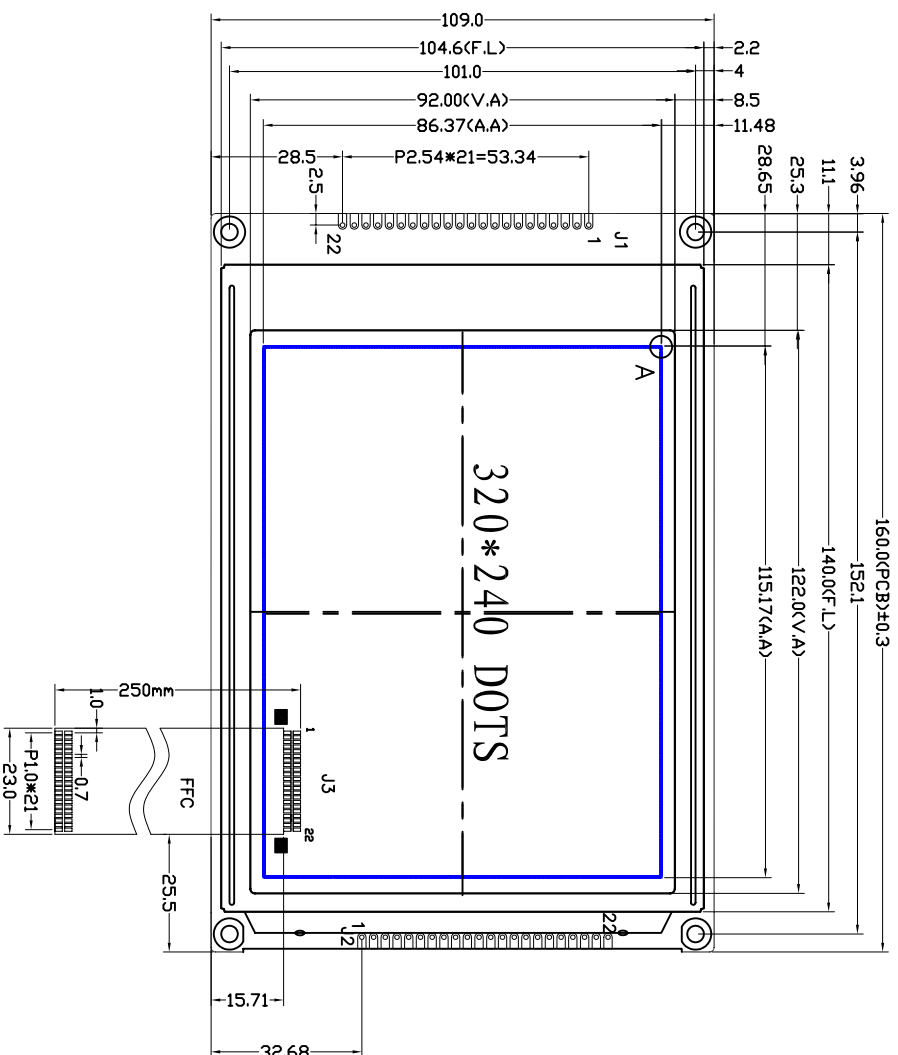

DETAIL OF DOT:(40:1)



J1/J2/J3: 三选一

接口选择使用，FFC选择使用

PIN	1	2	3	4	5	6	7	8	9	10	11	12
CONNECTION	GND	VCC	V0	A0	/WR	/RD	DB0	DB1	DB2	DB3	DB4	DB5
PIN	13	14	15	16	17	18	19	20	21	22		
CONNECTION	DB6	DB7	/CS	/RES	VOUT	SEL1	BLA	BLK	NC	NC		

- SPECIFICATION:**
- 1). Driving: Duts:1/240, Bias:1/17, Vout:-21.5V,Vo:-18.5V,Vdd:5.0V
 - 2). Viewing angle: 6 O'clock
 - 3). Display mode: STN Blue Negative/Transmissive
 - 4). Operating temp: -20C~+70C
 - 5). Storage temp: -30C~+80C
 - 6). Controller IC: RA8835AP3N (or compatible)
 - 7). Backlight: Edge(White), Vled 5.0V, Imax 160mA
 - 8). Dimensions with mark "()" are important, with mark "(")" are referenced
 - 9). All the raw materials are RoHS compliant

REV	REVISION RECORD	DATE	MODEL NO.		GENERAL TOL: ± 0.3	
A	First issue		TC		深圳市三元晶科技有限公司 Shenzhen TCC LCD Hi-Tech Co., Ltd.	
B			模组型号	SYM320240B8V35-5C1BLN1R8	未注公差	
C			APPROVED BY 审核	CHECKED BY 检查	DRAWING BY 绘图	UNIT: mm
D					Luoxian 2010/06/11	PAGE: 1 OF 1 UNIT: mm PROJECTION 三角法